

AC 550

Cummins
Mecc Alte
D+ &



ISO8528	GC,) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC
&\$\$\$#(#
z) \$' z'z' D:

	"	"	"	"	Amp
400/230	550,00	440,00	500,00	400,00	721,00

fP GDE
) & z
fDF DE
%\$! % %&
GC" \$(** z&(GC

Standard Specifications
z
fi ! E
z
z

ALTERNATOR
fi E
fi " E
fi " !" \$ E
TRANSFER SWITCH
fi

AC 550

Cummins
Mecc Alte
D+' &'

Manufacturer		Cummins		
Model		QSX 15 G8		
		%\$\$' "# "		
)\$\$\$\$' "		
		0+\$\$\$<DQ		
	L	15,000		
	"	137 x 169		
		17,0:1		
	fl # ı	"# "	1500	
	fl ı	L	91,00	
		L	66,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	36,30		
	' # "	637,00		
fl ' # ı	' # "	82,20		
	° C	515,00		
		24 V d.c.		
	Load	%\$\$ı	'+)ı)\$ı
	# "	105,00	79,00	55,00


		Mecc Alte		
		ECO 40-3S		
	Hz	50		
	"	500,00		
7cg'		0,80		
		3		
	fl ı	400/230		
	A	721,00		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 550	3850,00	3407,00	1550,00	2103,00	850,00
		fl ı		fl ı	
	"	"	"	"	L
MS 80	4850	4750	1560	2490	850

AC 550

Cummins
Mecc Alte
D+' &'

1 D+' &'

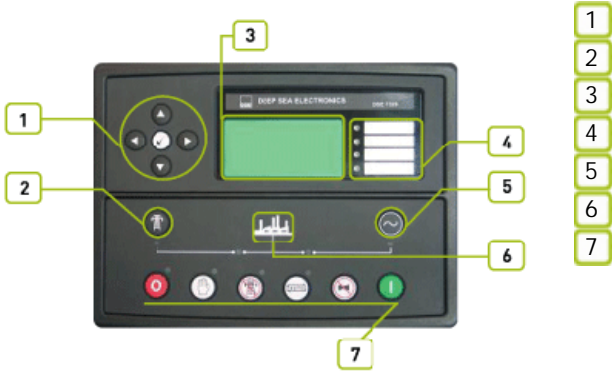

2

8G9ž '+' &\$ž
) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž
&&\$ž ž

8G9+' &\$ž
8G9+' &\$ž

ž

% &1*(
žFG' &žFG(,) ž

ž

AC 550

Cummins
Mecc Alte
D+ &

f@#@Bl
f@#@Bl

"z" "z" "z"

f@#@Bl

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&*(

&(\$)

ž

ž

ž

AC 550

Cummins
Mecc Alte
D+ &''



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1560
fl "L	"	4750
fl "L	"	2490
	L	850